

Dati Tecnici - Specifications

											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
JF80C A		702	400	10	12.5	3.2	53	117	60	132	0,43
JF80C W		702	350	10	9.8	20	52	115	59	130	0,43



Produzione Ghiaccio - Ice Production

Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	78	84	87	90
50°	172	185	192	198
21°	72	78	81	84
70°	159	172	179	185
32°	58	63	66	68
90°	128	139	145	150
38°	48	52	54	56
100°	106	115	119	123

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	76	81	84	86
50°	168	178	185	190
21°	72	77	80	82
70°	159	170	176	181
32°	68	74	76	78
90°	150	163	168	172
38°	64	70	71	72
100°	141	154	156	159



PANNELLO DI CONTROLLO - CONTROL PANEL



ACCESO
POWER ON

DEPOSITO PIENO
BIN FULL

ALTA T° CONDENSATORE
TOO HI COND.

MANCANZA ACQUA
NO WATER

ROTAZIONE ERRATA
WRONG ROTATION

DEPOSITO - BIN

20 Kg - 44 lbs


DIMENSIONI - DIMENSIONS

LxPxH(mm): 570 x 600 x 695
WxDxH(in): 22" 7/16 x 24" 10/16 x 27" 6/16

DATI SPEDIZIONE / SHIPPING DATA

LxPxH(mm): 640 x 660 x 870
WxDxH(in): 25" 3/16 x 26" x 34" 4/16

TIPO GHIACCIO - ICE TYPE



PERCENTUALE ACQUA RESIDUA 25%
ICE CONTAINS 25% RESIDUAL WATER

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 50Hz / 1



R134a GWP=1430

MIN

10°C (50°F)

5°C (41°F)

- 10 %

1 BAR (14 PSI)

MAX

40°C (104°F)




35°C (95°F)

+ 10 %

5 BAR (70 PSI)

Calore espulso - Rejected Heat
Volume aria - Air Volume

1014 W
185 m³/h

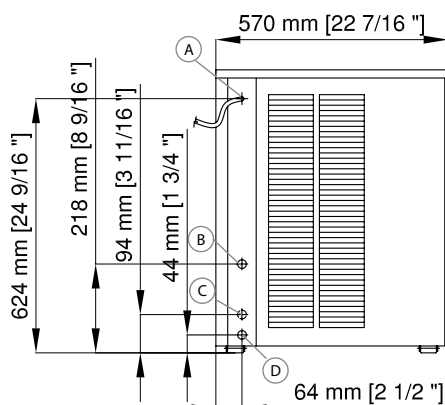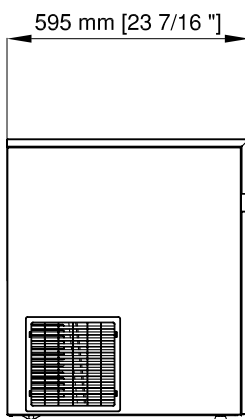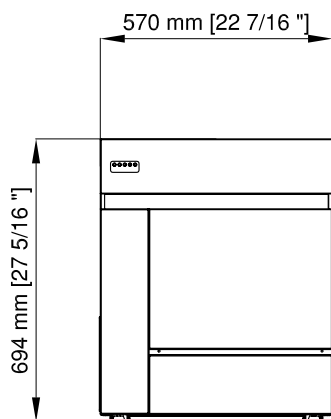

- (A) Alimentazione elettrica
Electrical cable supply
- (B) Attacco entrata acqua 3/4" gas
Water inlet connection 3/4" gas
- (C) Uscita acqua condensazione ad acqua Ø 20 mm
Water outlet connection-Water condensation Ø 20 mm
- (D) Attacco scarico acqua
Water drain ø 20 mm