

Dati Tecnici - Specifications

	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
JS90 A		1910	980	10	28,2	7,45	61	134	73	161	0,50
JS90 W		1910	820	10	19,7	51,4	61	134	73	161	0,53





24h Produzione Ghiaccio - Ice Production

Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	82	85	87	89
50°	181	187	192	196
21°	75	78	80	82
70°	165	172	176	181
32°	62	65	67	69
90°	137	143	148	152
38°	51	54	56	58
100°	112	119	123	128

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	82	85	87	89
50°	181	187	192	196
21°	78	82	84	86
70°	172	181	185	190
32°	73	76	79	82
90°	161	168	174	181
38°	69	72	75	78
100°	152	159	165	172

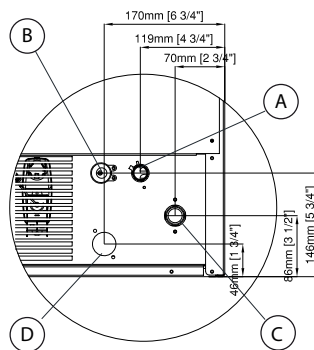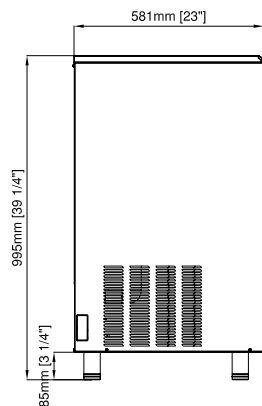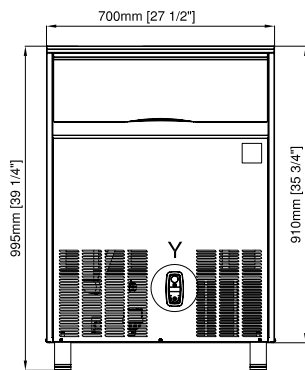

- A** Ingresso alimentazione elettrica
Electrical cable supply
- B** Attacco scarico acqua Ø 20 mm
Water outlet connection Ø 20 mm
- C** Attacco entrata acqua - 3/4" gas
Water inlet connection - 3/4" gas
- D** Uscita acqua condensatore ad acqua Ø 20 mm
Water outlet connection water condensation Ø 20 mm



PANNELLO DI CONTROLLO - CONTROL PANEL



CAPACITA' DEPOSITO - BIN CAPACITY

42 Kg - 93 lbs / 2100 pcs

DIMENSIONI - DIMENSIONS

LxPxH(mm): 700 x 580 x 995


WxDxH(in): 29" 9/16 x 23" 13/16 x 39" 3/16

DATI SPEDIZIONE / SHIPPING DATA

LxPxH(mm): 760 x 630 x 1070


WxDxH(in): 30" 15/16 x 25" 13/16 x 42" 2/16

TIPO GHIACCIO - ICE TYPE



20g

PESO GHIACCIO
WEIGHT ICE



56

PZ / CICLO
PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 50Hz / 1



R134a GWP=1430

MIN

MAX

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 BAR (14 PSI)



5 BAR (70 PSI)

Calore espulso - Rejected Heat
Volume aria - Air Volume

2865 W
450 m3/h