

Dati Tecnici - Specifications

											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
JS25 A		679	460	10	42.7	2,08	34	75	42	93	0.329
JS25 W		679	410	10	37.5	32,3	34	75	42	93	0.286



Produzione Ghiaccio - Ice Production

Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	17	21	22	24
50°	37	46	49	53
21°	16	20	21	23
70°	35	44	46	51
32°	14	18	19	21
90°	31	40	42	46
38°	12	15	16	17
100°	26	33	35	37

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	20	20.5	21.5	22.5
50°	44	45	47	50
21°	19.5	20	21	22
70°	43	44	46	49
32°	16.5	17.5	18.5	19.5
90°	36	39	41	43
38°	15	16	17	18
100°	33	35	37	40



PANNELLO DI CONTROLLO - CONTROL PANEL



Interruttore On/OFF
Switch ON/OFF

Vite regolazione
dimensione ghiaccio
Size ice regulation screw

CAPACITA' DEPOSITO - BIN CAPACITY

7 Kg - 15.4 lbs / 350 pcs

DIMENSIONI - DIMENSIONS

LxPxH(mm): 400 x 480 x 600


WxDxH(in): 16" 12/16 x 19" 14/16 x 24" 10/16

DATI SPEDIZIONE / SHIPPING DATA

LxPxH(mm): 460 x 540 x 760


WxDxH(in): 18" 2/16 x 21" 4/16 x 30" 15/16

TIPO GHIACCIO - ICE TYPE



20g

PESO GHIACCIO
WEIGHT ICE



18

PZ / CICLO
PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 50Hz / 1



R134a GWP=1430

MIN

MAX

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 BAR (14 PSI)





5 BAR (70 PSI)




Calore espulso - Rejected Heat
Volume aria - Air Volume

1056 W
185 m³/h

JS25 230V/1N/50Hz Self contain - Spray System

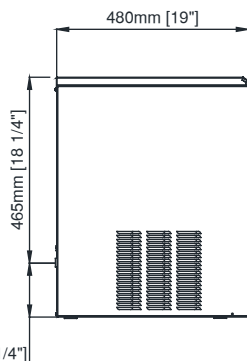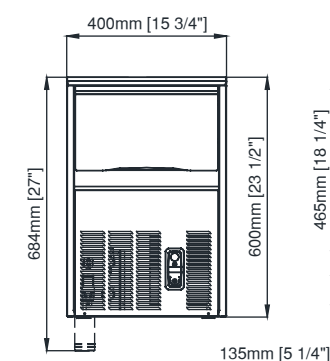

Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

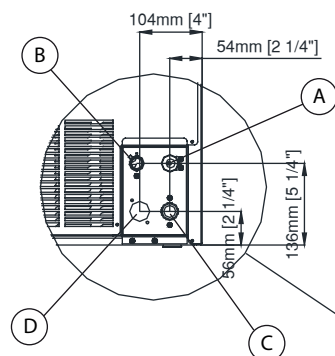

- A Ingresso alimentazione elettrica
Electrical cable supply
- B Attacco scarico acqua Ø 20 mm
Water outlet connection Ø 20 mm

- C Attacco entrata acqua - 3/4" gas
Water inlet connection - 3/4" gas
- D Uscita acqua condensatore ad acqua Ø 20 mm
Water outlet connection water condensation Ø 20 mm